

PT 120

Pre-tempered strip (bainite)

Grade overview

Grade ¹	e.g. C60S acc. to EN 10132-4
Delivery condition	Skin passed (+LC) or stretch bended

¹ Orders are placed acc. to material properties, the steel grades listed are only an example.

Chemical composition

C [%]	Si [%]	Mn [%]	P [%]	S [%]	Cr [%]
0.57 - 0.60	max. 0.35	0.60 - 0.90	max. 0.025	max. 0.025	max. 0.40

Weight %

Properties

Tensile strength	[MPa]	1,100 - 1,300
Yield / tensile ration	[%]	Ca. 80 - 85
Elongation A80 ²	[%]	Min. 9
Microstructure		Intermediate stage structure (bainite)

² Elongation value applies to the lowest tensile strength range.


Delivery types

Thickness ³	[mm]	0.20 - 3.00
Width ³	[mm]	5.00 - 450.00
Surface		Bright / grey-blue Decarburization < 2 % of material thickness per side

³ Dimension tolerance acc. to DIN EN 10140

Bending radii

Visualization of the minimally achievable bending radii at the specified material thickness.

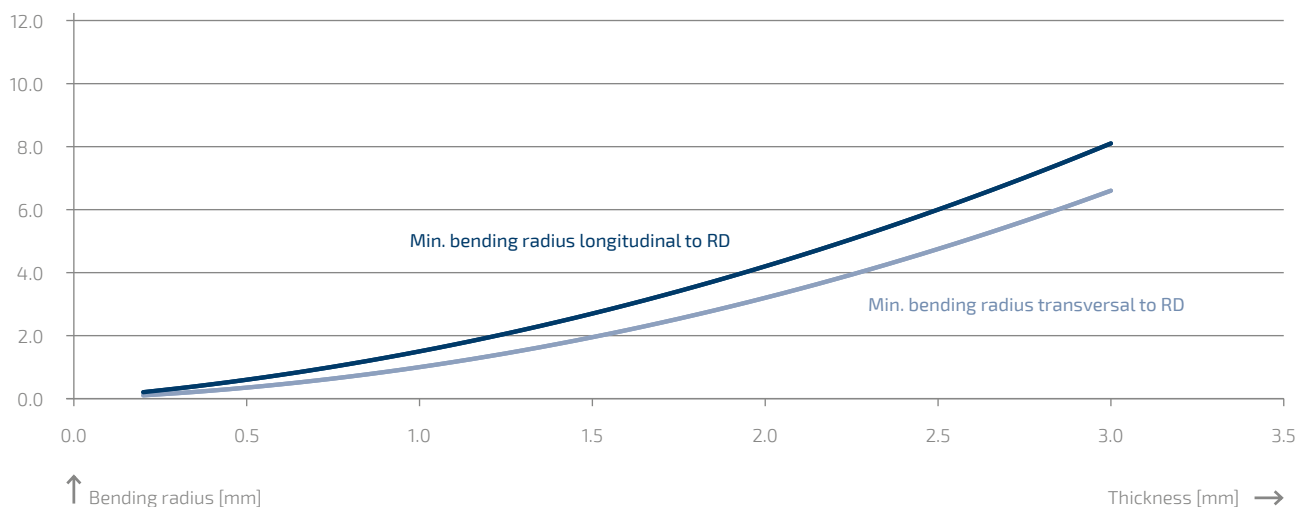

Contact

In case of individual requirements, please don't hesitate to contact us: pt-strip@waelzholz.com, Tel. +49 2331 964-2293